




FACT SHEET

Submersible Pumps

A submersible pump for monitoring wells with a diameter of minimum 40mm.

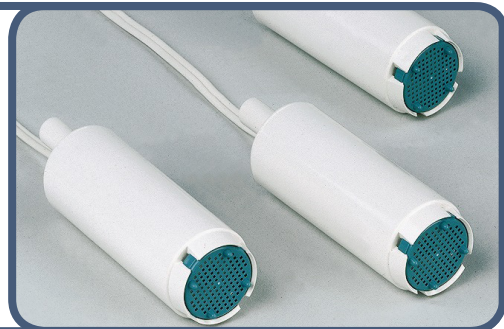

A low cost, centrifugal submersible pump for monitoring in small wells

Advantages

- Fits down a 40mm well
- Small but powerful motor
- Can pump to a height of 10m
- Adding a booster pump can be raised 20, 30 or more metres
- No risk of cross contamination
- Made from non-toxic ABS plastic, fitted with a stainless steel impeller.

Disadvantages

- Can only be used once.

Accessories

- 12 V battery.

Specifications

- 8 litres per minute
- 12 V battery for 1.5 hours
- Head lift of 8 metres.